


District of Columbia Clean Water Construction-State Revolving Fund (CWC-SRF) Site Summary

Green Alleys		Grant Funding Year(s) FY2013 & FY2018		
Erie Street SE		Lead Agency DDOT		
		Project Type Design/Construction		
Infrastructure Type Green	Project Category Roadway Retrofit	Address Alley between Highview Terrace, Denver, Erie, and 34 th Streets SE	Status Planning	
Design Start/End 1/15/2016 – 6/14/2017		Construction Start/End 2019		
Objective Retrofit of conventional alley to promote stormwater management and treatment through infiltration.				
Outputs <ul style="list-style-type: none"> • Designs and permits • Reconstructed 11,358 square foot alley with pervious cement, gravel reservoir, underdrain, membranes, and a terraced base layer to accommodate a steep grade. 				
Sewershed MS4	Watershed Potomac River	Subwatershed Oxon Run	Ward 8	
Outcomes				
Stormwater Treatment Volume	Contributing Drainage Area	Impervious Surface Removed	Trees Planted	Linear Stream Feet Restored
43,751 gallons	80,182 ft ²	15,128 ft ²	0	n/a


Preconstruction



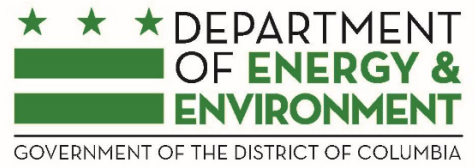

Construction

To be added when available

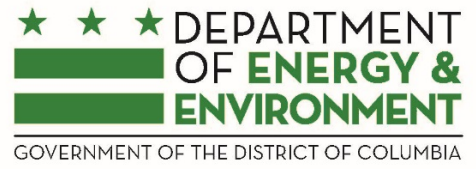

Completion

To be added when available