


## District of Columbia Clean Water Construction-State Revolving Fund (CWC-SRF) Site Summary


Schoolyard and Parkland Stormwater Retrofits			<b>Grant Funding Year(s)</b> FY2016	
<b>Palisades Community Center</b>			<b>Lead Agency</b> DOEE	
			<b>Project Type</b> Design/Construction	
<b>Infrastructure Type</b> Green	<b>Project Category</b> School/Recreational Facility Retrofit	<b>Address</b> 5200 Sherier Place NW	<b>Status</b> Construction	
<b>Design Start/End</b> May 2019 – September 2020		<b>Construction Start/End</b> October 2020 – November 2020		
<b>Objective</b> Manage stormwater and erosion by incorporating bioretention into the green space immediately adjacent (southeast) to the parking lot and the existing conveyance channel. This allows for water quality treatment of the runoff before discharging into the stream and reduces the erosion potential of the channel.				
<b>Outputs</b> <ul style="list-style-type: none"> <li>• Designs and permits</li> <li>• Bioretention basin</li> <li>• Drain guardian and pretreatment turret</li> </ul>				
<b>Sewershed</b> MS4	<b>Watershed</b> Potomac River	<b>Subwatershed</b> C&O Canal & Battery Kemble Creek	<b>Ward</b> 3	
<b>Outcomes</b>				
Stormwater Treatment Volume	Contributing Drainage Area	Impervious Surface Removed	Trees Planted	Linear Stream Feet Restored
13,658 gallons	22,545 ft <sup>2</sup>	n/a	0	n/a

## Preconstruction



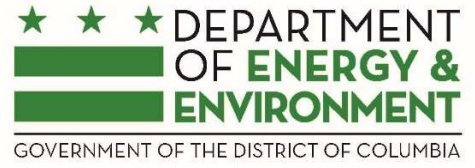

**Construction** *(to be added)*

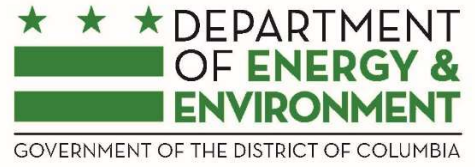

**Completion** (*to be added*)